

Section 11: Linear Mechanical Equations

The displacement $x(t)$ at the time t of an object subjected to a spring force and damping force satisfied the ODE

$$mx'' + \beta x' + kx = 0.$$

- ▶ m is the mass,
- ▶ β is the damping coefficient, and
- ▶ k is the spring constant.

This was derived by summing the forces. Total force $F = mx''$, damping force $F_{\text{damping}} = \beta x'$, spring force $F_{\text{spring}} = kx$

Free Damped Motion

The equation in standard form is

$$\frac{d^2x}{dt^2} + 2\lambda \frac{dx}{dt} + \omega^2 x = 0$$

where

$$2\lambda = \frac{\beta}{m} \quad \text{and} \quad \omega = \sqrt{\frac{k}{m}}.$$

Three qualitatively different solutions can occur depending on the nature of the roots of the characteristic equation

Damping Types

$$\frac{d^2x}{dt^2} + 2\lambda\frac{dx}{dt} + \omega^2x = 0$$

The roots¹ of the characteristic equation are

$$r = -\lambda \pm \sqrt{\lambda^2 - \omega^2}$$

The motion is called

- ▶ **over damped** if there are two, distinct real roots (decay only, no oscillations)
- ▶ **critically damped** if there is one, repeated real root (fastest decay, no oscillations), and
- ▶ **under damped** if the roots are complex conjugates (decay with oscillations).

¹ **Observation:** Conservation of energy ensures that for all cases with damping, the **real** part of the roots of the characteristic equation ($-\lambda$) **MUST be negative**.

Comparison of Damping

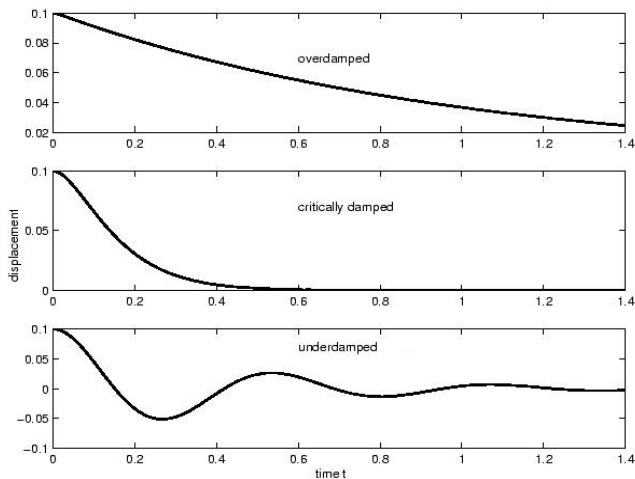


Figure: Comparison of motion for the three damping types.

Initial Conditions

Given an initial position $x(0) = x_0$ and initial velocity $x'(0) = x_1$, the displacement will satisfy an initial value problem

$$mx'' + \beta x' + kx = 0 \quad x(0) = x_0 \quad x'(0) = x_1$$

A couple of terms: If an object is released

- ▶ **from equilibrium**, it means that $x(0) = 0$;
- ▶ **from rest**, it means that $x'(0) = 0$.

Example

A 2 kg mass is attached to a spring whose spring constant is 12 N/m. The surrounding medium offers a damping force numerically equal to 10 times the instantaneous velocity. Write the differential equation describing this system. Determine if the motion is underdamped, overdamped or critically damped.

The ode is $m x'' + \beta x' + k x = 0$

$$m = 2$$

$$\beta = 10$$

$$k = 12$$

$$2 x'' + 10 x' + 12 x = 0$$

In standard form

$$x'' + 5 x' + 6 x = 0$$

with Characteristic equation

$$r^2 + 5r + 6 = 0$$

$$(r + 3)(r + 2) = 0$$

$$\Rightarrow r = -3 \text{ or } r = -2$$

Two distinct real roots \Rightarrow

the system is overdamped.

This is the answer.

Aside: $x'' + 5x' + 6x = 0$

$$x'' + 2\lambda x' + \omega^2 x = 0$$

Here $\omega^2 = 6$, and $2\lambda = 5 \Rightarrow \lambda = \frac{5}{2}$

$$\lambda^2 = \left(\frac{5}{2}\right)^2 = \frac{25}{4}$$

$$\lambda^2 - \omega^2 = \frac{25}{4} - 6$$

$$= \frac{25}{4} - \frac{24}{4} = \frac{1}{4} > 0$$

$\lambda^2 > \omega^2 \Rightarrow$ system is overdamped.

Example

A 64 lb object stretches a spring 4 ft in equilibrium. It is attached to a dashpot with damping constant $\beta = 8$ lb-sec/ft. The object is initially displaced 18 inches above equilibrium and given a downward velocity of 4 ft/sec. Find its displacement for all $t > 0$.

The ODE is $mx'' + \beta x' + kx = 0$

We're given $\beta = 8$, we need m and k .

The weight $W = 64$ lb. The mass

$$m = \frac{W}{g} = \frac{64 \text{ lb}}{32 \text{ ft/sec}^2} = 2 \text{ slugs}$$

The spring constant $k = \frac{W}{\delta x} = \frac{64 \text{ lb}}{4 \text{ ft}} = 16 \frac{\text{lb}}{\text{ft}}$

The ODE is $2x'' + 8x' + 16x = 0$

In standard form

$$x'' + 4x' + 8x = 0$$

The IC are

$$x(0) = 1.5 \quad x'(0) = -4$$

Solve this IVP. The characteristic polynomial is

$$r^2 + 4r + 8 = 0$$

$$r^2 + 4r + 4 + 4 = 0$$

$$(r+2)^2 = -4$$

$$r+2 = \pm \sqrt{-4} = \pm 2i$$

$$r = -2 \pm 2i$$

← under damped

$$x_1 = e^{-2t} \cos(2t), \quad x_2 = e^{-2t} \sin(2t)$$

The general solution

$$x = C_1 e^{-2t} \cos(2t) + C_2 e^{-2t} \sin(2t)$$

Apply $x(0) = 1.5, \quad x'(0) = -4$

$$x' = -2C_1 e^{-2t} \cos(2t) - 2C_1 e^{-2t} \sin(2t) - 2C_2 e^{-2t} \sin(2t) + 2C_2 e^{-2t} \cos(2t)$$

$$e^0 = 1, \cos(0) = 1, \sin(0) = 0$$

$$X(0) = C_1 = 1.5 \Rightarrow C_1 = 1.5$$

$$X'(0) = -2C_1 + 2C_2 = -4$$

$$-3 + 2C_2 = -4$$

$$2C_2 = -1$$

$$C_2 = -0.5$$

The displacement

$$x = 1.5 e^{-2t} \cos(2t) - 0.5 e^{-2t} \sin(2t)$$

Driven Motion

We can consider the application of an external driving force (with or without damping). Assume a time dependent force $f(t)$ is applied to the system. The ODE governing displacement becomes

$$m \frac{d^2 x}{dt^2} = -\beta \frac{dx}{dt} - kx + f(t), \quad \beta \geq 0.$$

Divide out m and let $F(t) = f(t)/m$ to obtain the nonhomogeneous equation

$$\frac{d^2 x}{dt^2} + 2\lambda \frac{dx}{dt} + \omega^2 x = F(t)$$

Forced Undamped Motion and Resonance

Consider the case $F(t) = F_0 \cos(\gamma t)$ or $F(t) = F_0 \sin(\gamma t)$, and $\lambda = 0$.
Two cases arise

$$(1) \quad \gamma \neq \omega, \quad \text{and} \quad (2) \quad \gamma = \omega.$$

Taking the sine case, the DE is

$$x'' + \omega^2 x = F_0 \sin(\gamma t)$$

with complementary solution

$$x_c = c_1 \cos(\omega t) + c_2 \sin(\omega t).$$

$$x'' + \omega^2 x = F_0 \sin(\gamma t)$$

Note that

$$x_c = c_1 \cos(\omega t) + c_2 \sin(\omega t).$$

Using the method of undetermined coefficients, the **first guess** to the particular solution is

$$x_p = A \cos(\gamma t) + B \sin(\gamma t) \quad \text{If } \gamma \neq \omega, \text{ then}$$

x_p + x_c have no like terms in common, so this x_p is correct.

$$x = c_1 \cos(\omega t) + c_2 \sin(\omega t) + A \cos(\gamma t) + B \sin(\gamma t)$$

$$x'' + \omega^2 x = F_0 \sin(\gamma t)$$

Note that

$$x_c = c_1 \cos(\omega t) + c_2 \sin(\omega t).$$

Using the method of undetermined coefficients, the **first guess** to the particular solution is

$$x_p = A \cos(\gamma t) + B \sin(\gamma t) \quad \text{If } \gamma = \omega, \text{ then this}$$

has like terms in common w/ x_c . We have to multiply by t .

$$x_p = (A \cos(\omega t) + B \sin(\omega t)) t = A t \cos(\omega t) + B t \sin(\omega t).$$

Then

$$x = c_1 \cos(\omega t) + c_2 \sin(\omega t) + A t \cos(\omega t) + B t \sin(\omega t).$$

grows without bound!

Forced Undamped Motion and Resonance

For $F(t) = F_0 \sin(\gamma t)$ starting from rest at equilibrium:

$$\text{Case (1): } x'' + \omega^2 x = F_0 \sin(\gamma t), \quad x(0) = 0, \quad x'(0) = 0$$

$$x(t) = \frac{F_0}{\omega^2 - \gamma^2} \left(\sin(\gamma t) - \frac{\gamma}{\omega} \sin(\omega t) \right)$$

If $\gamma \approx \omega$, the amplitude of motion could be rather large!

Pure Resonance

Case (2): $x'' + \omega^2 x = F_0 \sin(\omega t)$, $x(0) = 0$, $x'(0) = 0$

$$x(t) = \frac{F_0}{2\omega^2} \sin(\omega t) - \frac{F_0}{2\omega} t \cos(\omega t)$$

Note that the amplitude, α , of the second term is a function of t :

$$\alpha(t) = \frac{F_0 t}{2\omega}$$

which grows without bound!

► Forced Motion and Resonance Applet

Choose "Elongation diagram" to see a plot of displacement. Try exciter frequencies close to ω .