

## Section 4: First Order Equations: Linear

### First Order Linear ODE in Standard Form

We are considering first order ODEs of the form<sup>a</sup>

$$\frac{dy}{dx} + P(x)y = f(x), \quad (1)$$

where we'll assume that  $P$  and  $f$  are continuous on the interval of interest.

---

<sup>a</sup>The identifying characteristic that makes this *standard* form is that the coefficient of the highest derivative is 1.

# The Solutions of $\frac{dy}{dx} + P(x)y = f(x)$

The solution to a first order linear ODE always has the same basic structure

$$y(x) = y_c(x) + y_p(x) \quad \text{where}$$

- ▶  $y_c$  is called the **complementary** solution. The complementary solution solves **associated homogeneous** equation,  $\frac{dy}{dx} + P(x)y = 0$ , and
- ▶  $y_p$  is called the **particular** solution. The particular solution depends heavily on  $f$  and is zero if  $f(x) = 0$ .

With higher order equations, we'll have to find  $y_c$  and  $y_p$  separately, but for first order equations we have a process for finding the whole solution.

## Derivation of Solution via Integrating Factor

Solve the equation in standard form

$$\frac{dy}{dx} + P(x)y = f(x)$$

To solve this equation, we seek a function  $\mu(x)$  called an **integrating factor**. The idea is that multiplying the equation through by this function  $\mu$  will result in the left side collapsing as the derivative of the product,  $\frac{d}{dx}(\mu y)$ . In other words, for the correct function  $\mu$

$$\mu \left( \frac{dy}{dx} + P(x)y \right) = \mu f(x) \implies \frac{d}{dx}(\mu y) = \mu(x)f(x).$$

We found that the correct integrating factor is

$$\mu = e^{\int P(x) dx}.$$

# Integrating Factor

## Integrating Factor

For the first order, linear ODE in standard form

$$\frac{dy}{dx} + P(x)y = f(x),$$

the integrating factor

$$\mu(x) = \exp\left(\int P(x) dx\right).$$

Let's finish finding the solution  $y$  to the ODE and then look at the process and examples.

$$\frac{dy}{dx} + P(x)y = f(x)$$

Use the integrating factor,  $\mu = e^{\int P(x) dx}$ , to determine the solutions to the ODE.

Multiply by  $\mu$  and the equation collapses

$$\mu \left( \frac{dy}{dx} + P(x)y \right) = \mu f(x)$$

$$\frac{d}{dx} (\mu y) = \mu(x) f(x)$$

Integrate

$$\int \frac{d}{dx} (\mu y) dx = \int \mu(x) f(x) dx$$

$$\mu y = \int \mu(x) f(x) dx$$

Divide by  $\mu$

$$y = \frac{1}{\mu} \int \mu(x) f(x) dx$$
$$= \frac{1}{\mu} \left( \int \mu(x) f(x) dx + C \right)$$

$$y = \underbrace{\frac{1}{\mu} \int \mu(x) f(x) dx}_{y_p} + \underbrace{\frac{C}{\mu}}_{y_c}$$

## Solution Process 1<sup>st</sup> Order Linear ODE

- ▶ Put the equation in standard form  $y' + P(x)y = f(x)$ , and correctly identify the function  $P(x)$ .
- ▶ Obtain the integrating factor  $\mu(x) = \exp\left(\int P(x) dx\right)$ .
- ▶ Multiply both sides of the equation (in standard form) by the integrating factor  $\mu$ . The left hand side **will always** collapse into the derivative of a product

$$\frac{d}{dx}[\mu(x)y] = \mu(x)f(x).$$

- ▶ Integrate both sides, and solve for  $y$ .

$$y(x) = \frac{1}{\mu(x)} \int \mu(x)f(x) dx$$

$$y(x) = e^{-\int P(x) dx} \left( \int e^{\int P(x) dx} f(x) dx + C \right)$$

## Example

Solve the initial value problem

$$x \frac{dy}{dx} - y = 2x^2, \quad x > 0 \quad y(1) = 5$$

The ODE is 1<sup>st</sup> order linear. In standard form it is

$$\frac{dy}{dx} - \frac{1}{x} y = 2x \quad P(x) = \frac{-1}{x}$$

Build  $\mu = e^{\int P(x) dx}$

$$\mu = e^{\int \frac{-1}{x} dx} = e^{-\ln x} = e^{\ln x^{-1}} = x^{-1}$$

we could have  $\mu = e^{\ln x^{-1} + C} = e^{\ln x^{-1}} \cdot e^C = e^C x^{-1}$

we'll take the "+C" to be zero



so  $\mu = x^{-1}$ . Multiply the ODE by  $\mu$

$$x^{-1} \left( \frac{dy}{dx} - \frac{1}{x} y \right) = x^{-1} (2x)$$

$$\frac{d}{dx} (x^{-1} y) = 2$$

Integrate  $\int \frac{d}{dx} (x^{-1} y) dx = \int 2 dx$

$$x^{-1} y = 2x + C$$

$$y = \frac{2x + C}{x^{-1}} = 2x^2 + Cx$$

$y = 2x^2 + Cx$  is a 1-parameter family of solutions to the ODE.

Apply  $y(1) = 5$

$$y(1) = 2(1)^2 + C(1) = 5$$

$$2 + C = 5 \Rightarrow C = 3$$

The solution to the IVP is

$$y = 2x^2 + 3x$$

$x^{-1} \left( \frac{dy}{dx} - \frac{1}{x} y \right) \stackrel{?}{=} \frac{d}{dx} (x^{-1} y)$  is this true??

LHS  $x^{-1} \frac{dy}{dx} - x^{-1} \frac{1}{x} y = x^{-1} \frac{dy}{dx} - x^{-2} y$

Same!!

RHS  $\frac{d}{dx} (x^{-1} y) = x^{-1} \frac{dy}{dx} + (-1x^{-2}) y = x^{-1} \frac{dy}{dx} - x^{-2} y$

## Verify

Just for giggles, let's verify that our solution  $y = 2x^2 + 3x$  really does solve the differential equation we started with

$$x \frac{dy}{dx} - y = 2x^2.$$

$$y = 2x^2 + 3x \quad , \quad y' = 4x + 3$$

$$x \frac{dy}{dx} - y \stackrel{?}{=} 2x^2$$


$$x(4x + 3) - (2x^2 + 3x) \stackrel{?}{=} 2x^2$$

$$4x^2 + 3x - 2x^2 - 3x \stackrel{?}{=} 2x^2$$

$$2x^2 = 2x^2$$



## Steady and Transient States

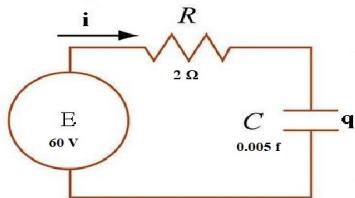

**Figure:** The charge  $q(t)$  on the capacitor in the given circuit satisfies a first order linear equation.

$$2 \frac{dq}{dt} + 200q = 60, \quad q(0) = 0.$$

Solve this IVP for the charge  $q(t)$  on the capacitor for  $t > 0$ .

The ODE is 1st order linear, in standard form

it is 
$$\frac{dq}{dt} + 100q = 30$$

$$2 \frac{dq}{dt} + 200q = 60, \quad q(0) = 0$$

$$P(t) = 100 \quad \mu = e^{\int P(t) dt} = e^{\int 100 dt} = e^{100t}$$

Multiply by  $\mu$  and collapse

$$e^{100t} (q' + 100q) = 30 e^{100t}$$

$$\frac{d}{dt} (e^{100t} q) = 30 e^{100t}$$

$$\int \frac{d}{dt} (e^{100t} q) dt = \int 30 e^{100t} dt$$

$$e^{100t} q = 30 \frac{e^{100t}}{100} + k$$

$$q = \frac{\frac{3}{10} e^{100t} + k}{e^{100t}} = \frac{3}{10} + k e^{-100t}$$

$q = \frac{3}{10} + k e^{-100t}$  is a 1-parameter family of solutions to the ODE.

Apply  $q(0) = 0$        $q(0) = \frac{3}{10} + k e^{-100(0)} = 0$

$$\frac{3}{10} + k = 0 \Rightarrow k = -\frac{3}{10}$$

The charge on the capacitor is

$$q = \frac{3}{10} - \frac{3}{10} e^{-100t}$$

## Steady and Transient States

Note that the solution, the charge, consists of a complementary and a particular solution,  $q = q_p + q_c$ .

$$q(t) = \frac{3}{10} - \frac{3}{10}e^{-100t}$$

$$q_c(t) = -\frac{3}{10}e^{-100t} \quad \text{and} \quad q_p(t) = \frac{3}{10}$$

Evaluate the limit

$$\lim_{t \rightarrow \infty} q_c(t) = \lim_{t \rightarrow \infty} -\frac{3}{10} e^{-100t} = 0$$

## Steady and Transient States

The complementary solution contains the information given by the initial condition, and for some physical systems like this the complementary solution decays.

**Definition:** Such a decaying complementary solution is called a **transient state**.

Note that due to this decay, after a while  $q(t) \approx q_p(t)$ .

**Definition:** Such a corresponding particular solution is called a **steady state**.